

Digital Video for BICSI Folks

Karl Rosenberg
Regional Applications Specialist
Extron Electronics



2017
BICSI CANADIAN
CONFERENCE & EXHIBITION
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA



Bicsi

Agenda

- Digital Video Signal Characteristics
 - EDID and HDCP
- Digital Signal Types
 - USB and HDMI
- Resolution and Color
- Transmission Methods



2017
BICSI CANADIAN
CONFERENCE & EXHIBITION
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA



Bicsi

Digital Video Signal Characteristics

2017
**BICSI CANADIAN
CONFERENCE & EXHIBITION**
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA

Bicsi

Introduction

- Technology is constantly evolving
 - Video formats
 - Communication
 - Collaboration
 - Mobile/wireless



- This evolution creates AV system design challenges

Signal Integrity

- Distance and quality – how far is too far?
- Cable quality – are all cables the same?
- Cables or electronics?
- Connections – how many connection points?





?



Signal Integrity


- Digital video signal loss – cliff effect

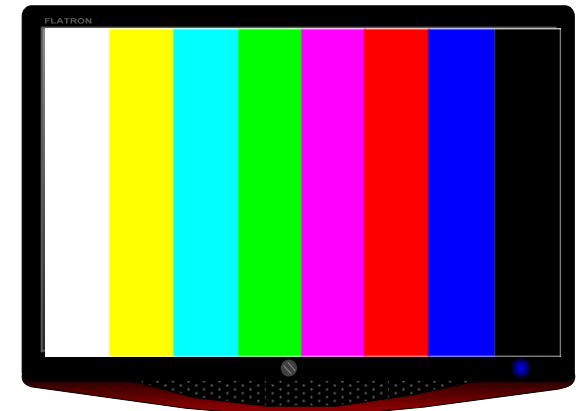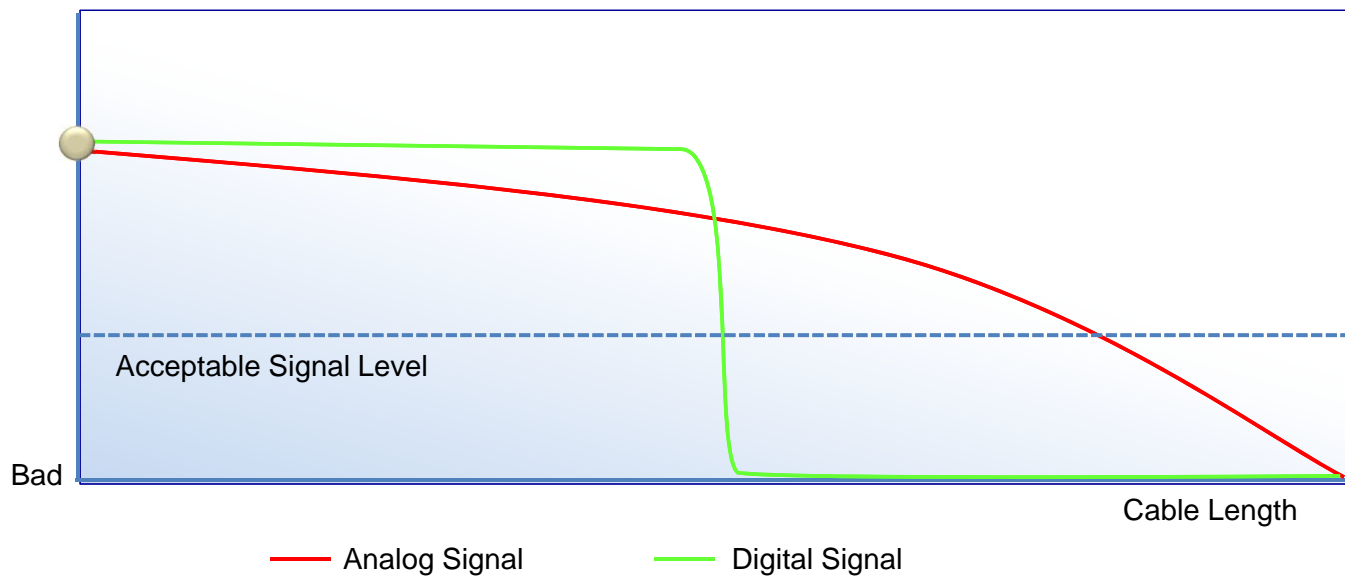

LCD Monitor


Digital Video Characteristics – Eye Diagram

- An Eye Diagram is formed by repeated sampling of a digital signal
 - The eye pattern is a useful tool in measuring overall signal quality

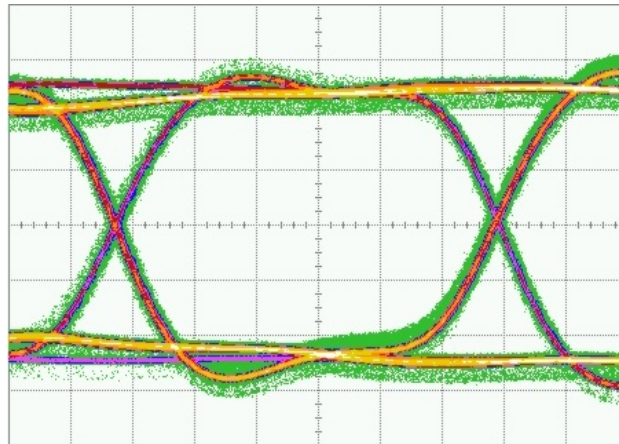


Digital Video Characteristics – Bit Errors

- The mask allows you to identify when bit errors occur
- The signal touching the mask is an indication of a bit error

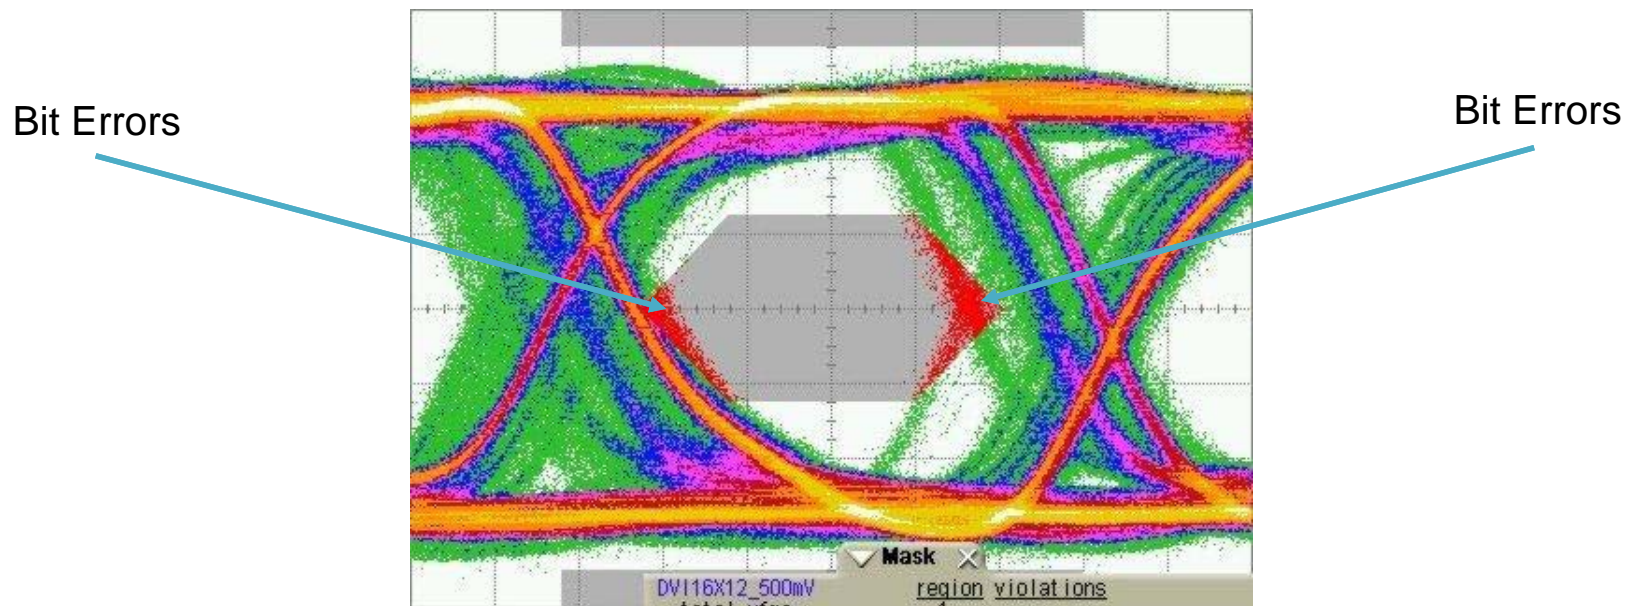







Digital Video Characteristics – Loss

- Digital video signals consist of high speed transitions
- Very susceptible to degradation from:
 - Cable attenuation
 - Cable capacitance
 - Cable resistance
 - Impedance mismatch
 - Noise coupling
 - Crosstalk
 - Jitter
- All factors that affect the receiver's ability to distinguish high and low transitions

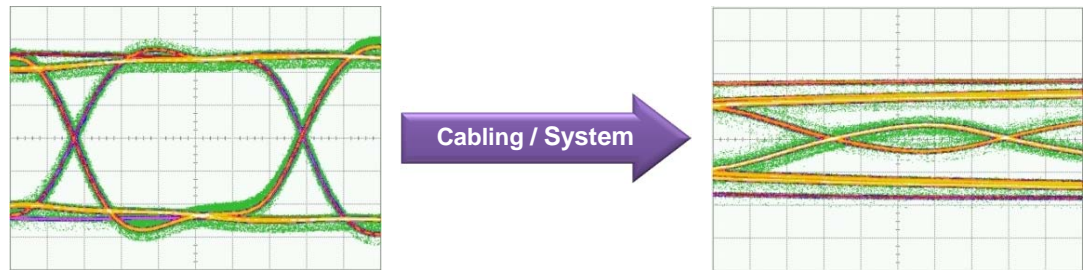

Digital Video Characteristics – Loss

- Difficult to anticipate
 - Image quality does not degrade like analog
- Cliff effect
 - Occurs when the receiver can no longer distinguish high and low values
 - Too many bit errors have occurred

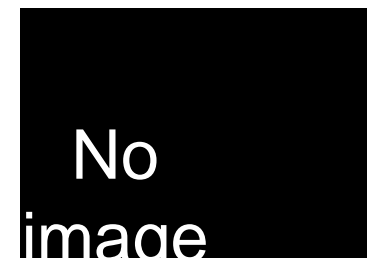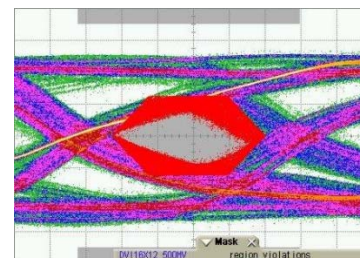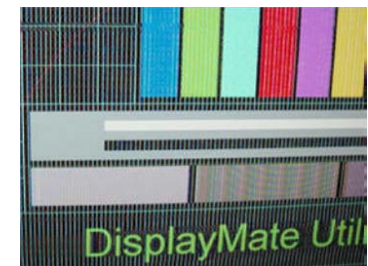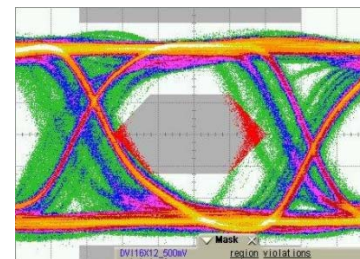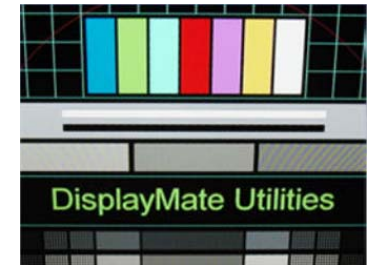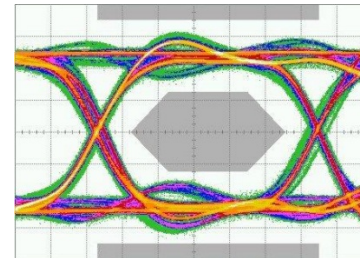

- My Documents
- WordPad
- My Computer
- HHHHHHH...
- Recycle Bin
- DTD Calculator
- Internet Explorer
- ELDIM EDIDViewer
- Adobe Reader 8
- MonInfo
- EDID Editor
- EDID
- Media Player Classic
- softMCCS
- VLC media player
- Chris
- Video Card Drivers
- CCleaner
- 512007Temp

Microsoft
Windows XP
Professional

start

1:14 PM

EDID

Extended Display Identification Data




2017
BICSI CANADIAN
CONFERENCE & EXHIBITION
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA

Bicsi


EDID – Data

- EDID contains the following information:
 - Sink identity – device type, model number, etc.
 - Sink capability – video/audio
 - Video timing parameters, color space, audio formats, etc.
- EDID also defines the data structure
 - Block 0 – 128 byte of hexadecimal data
 - Block 1 – additional 128 byte of hexadecimal data
 - Block 1 was added in version 1.3

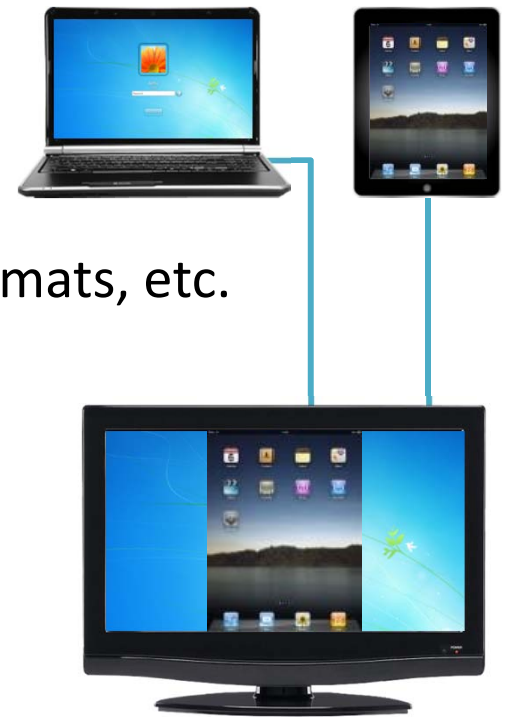


EDID – Sequence

1. Power on PC or activate external graphics card
2. Computer requests EDID data from display
3. Display sends EDID data to computer
4. Computer attempts to match display parameters

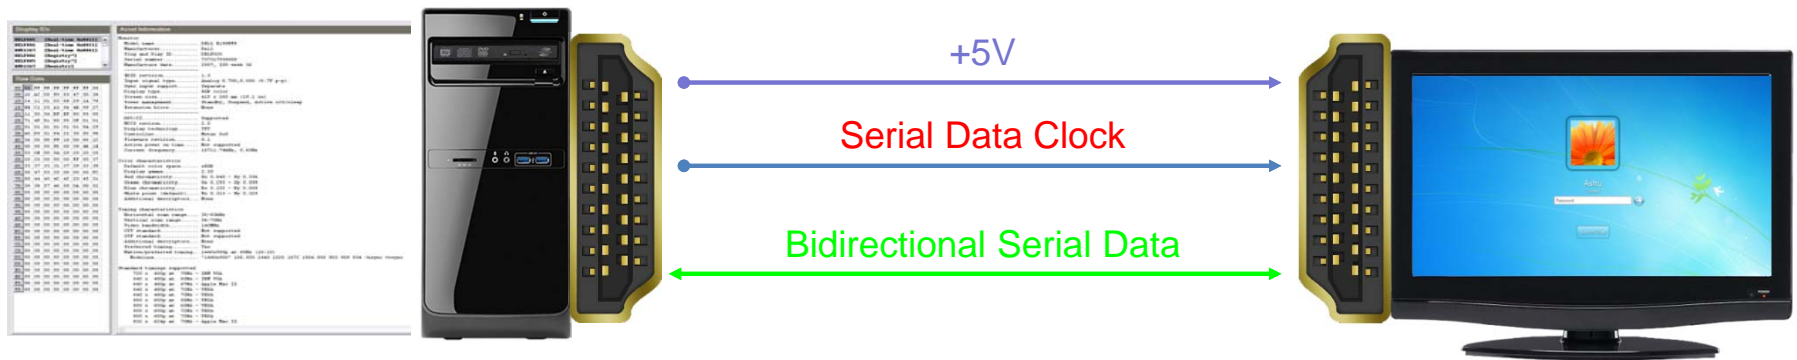

EDID Minder

- Provides communication to the connected source to ensure it boots up using the correct video/audio output parameters

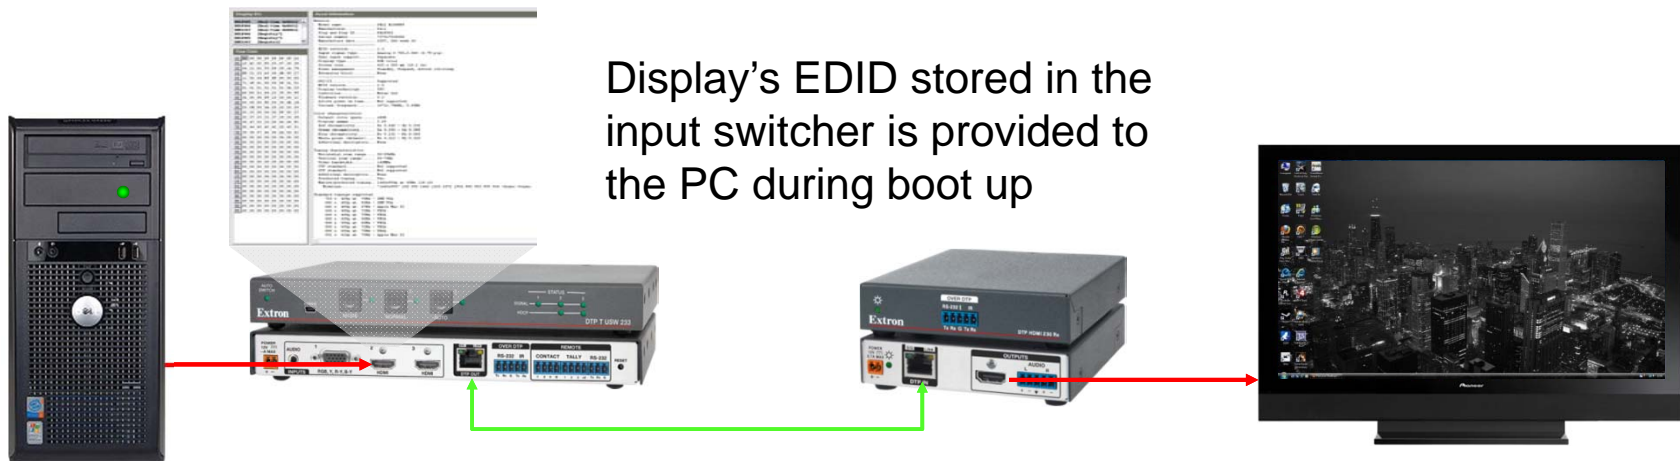

Scaler Solution

- BYOD equipment with Scaler/EDID Minder
 - Resolution management



- Reformats signal for system requirements
- Delivers consistent resolution to endpoints

HDCP

High-bandwidth Digital Content Protection

2017
BICSI CANADIAN
CONFERENCE & EXHIBITION
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA

Bicsi

HDCP – Protocol

- HDCP protocol is a 3-phase process
 - Authentication
 - Content encryption
 - Renewability
- This can take a few moments depending on the number of downstream devices



DVD Player



Blu-ray with HDMI




Challenges: HDCP

- Many sources encrypt playback of high value content
- Content encrypted with HDCP
- Typical sources are:
 - Blu-ray players
 - Cable/satellite receivers
 - PC, Mac and iOS devices
- HDCP can negatively affect switching performance
- Some devices unnecessarily encrypt output




What If You Get It Wrong?

- Slow source switching
- Streamed content may not work as expected
- System may fail to display an image
- Can be difficult to troubleshoot

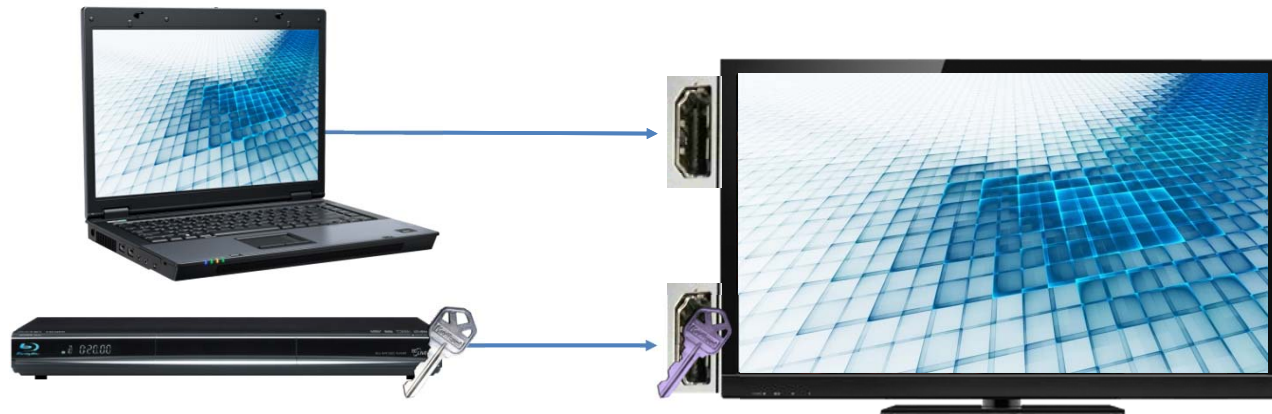


HDCP Handshakes

- I/O authentication

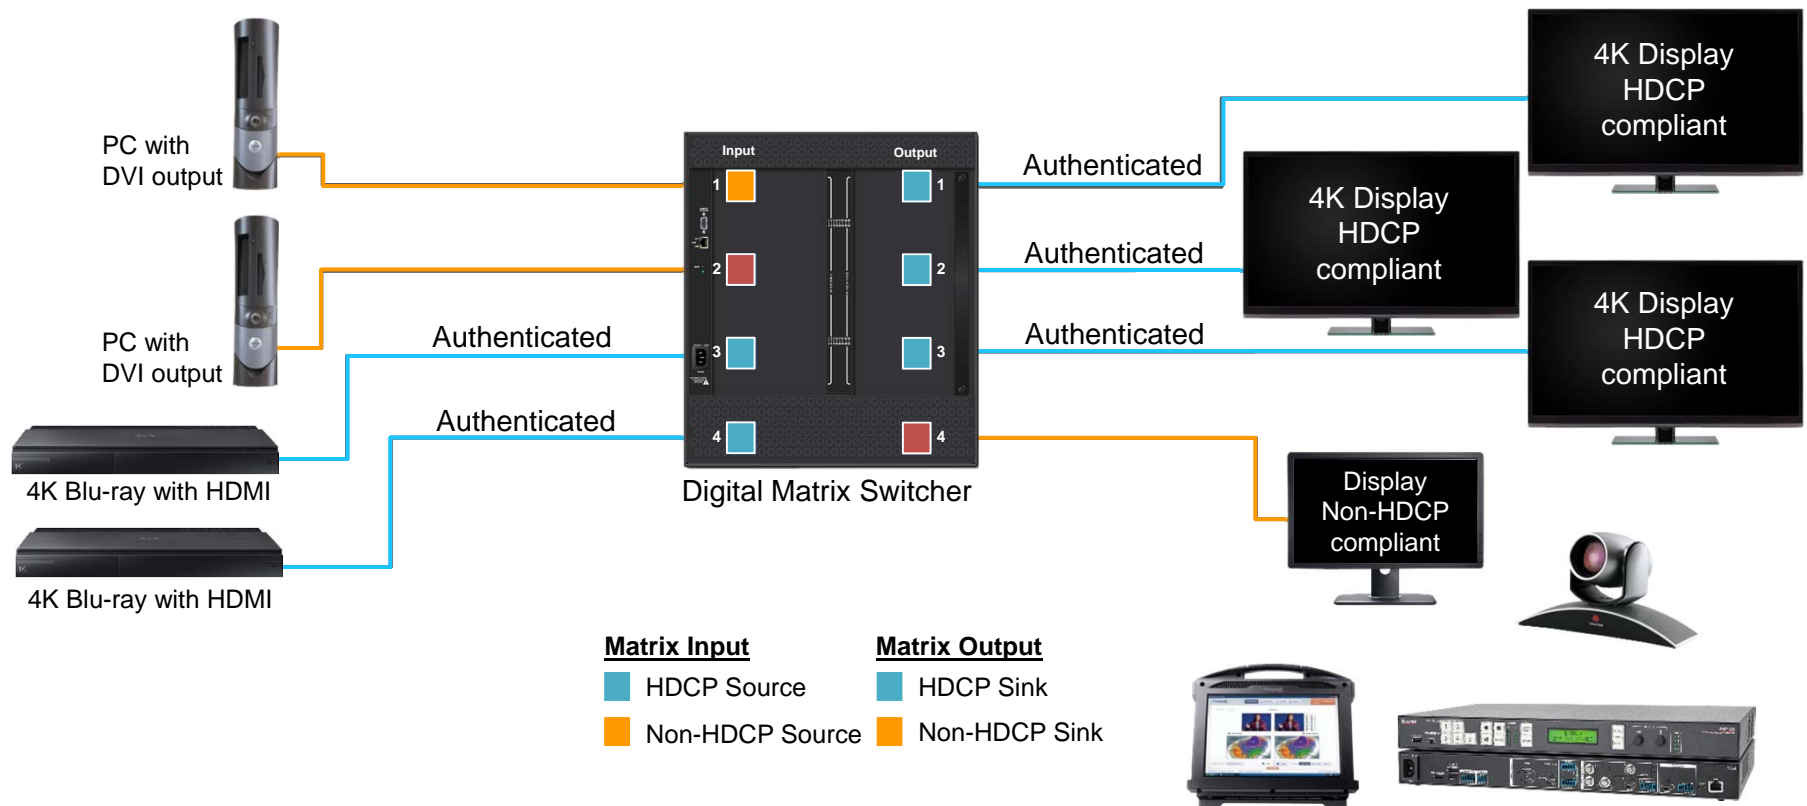

HDCP Handshakes With Products That Are Not HDCP Compliant

- Visual confirmation

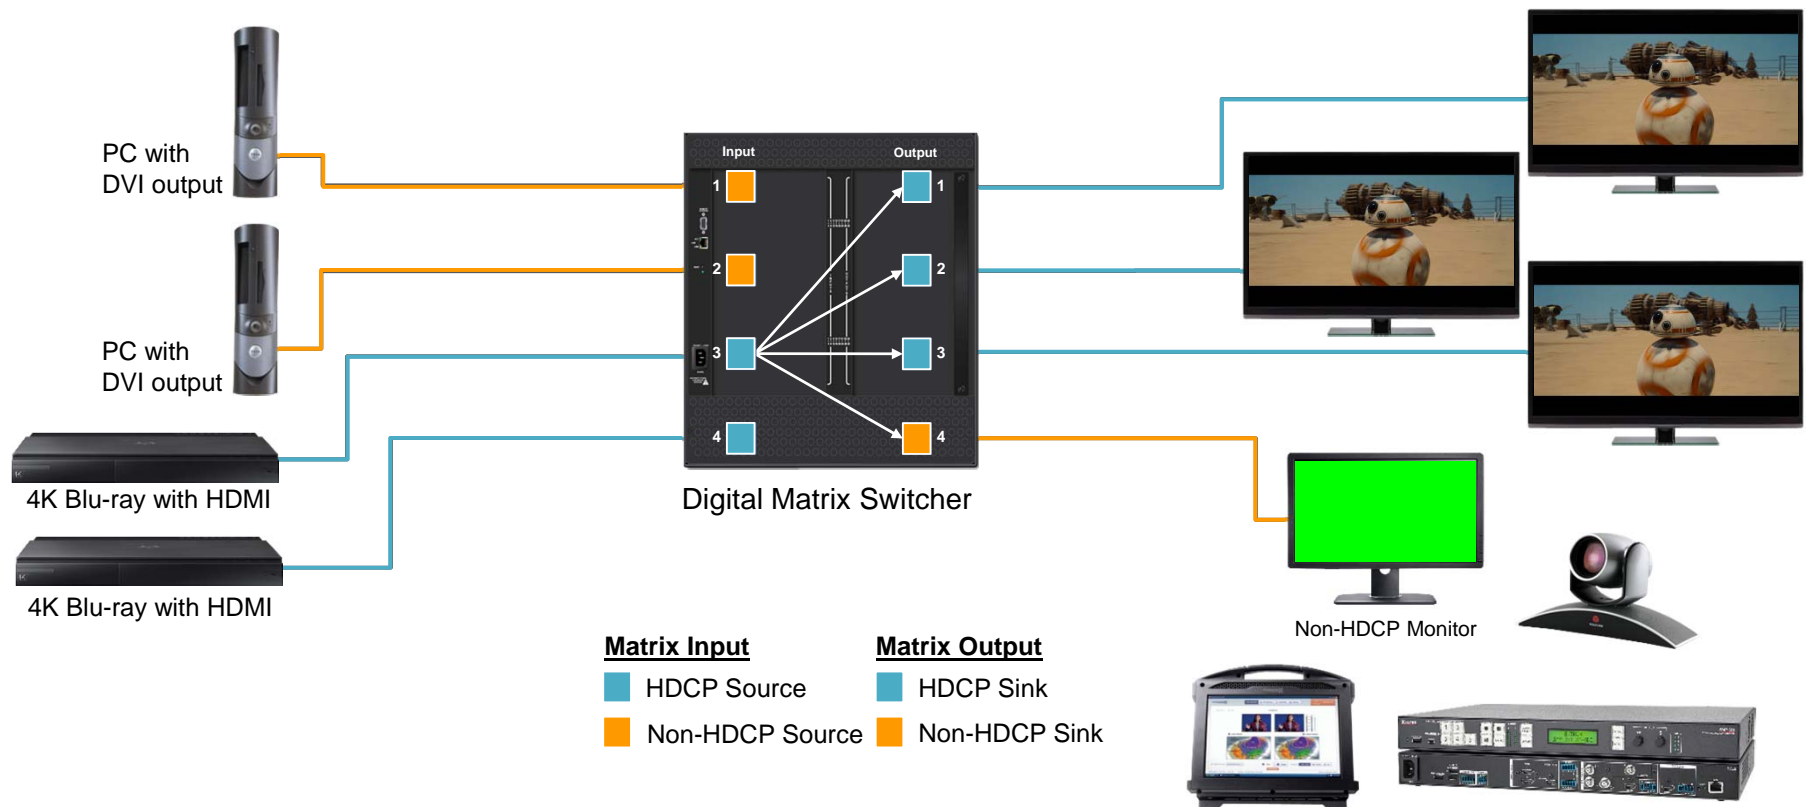

Digital Signal Types

USB and HDMI

2017
**BICSI CANADIAN
CONFERENCE & EXHIBITION**
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA

Bicsi


Digital Signals – USB

- A standard for communication protocols that includes cables and connectors
- Historically used for attaching peripheral devices to computers



Digital Signals – USB

- Over the years speeds have increased and USB supports video and audio transfer
 - USB 2.0 - 480 Mbps
 - USB 3.0 - 5 Gbps
- Providing additional options for transporting video and audio



USB Type-C

- Latest, high speed, reversible USB
- 10Gbps data rate (V3.1), V3.0 = 5Gbps
- Deliver up to 100 watts! Devices negotiate...
- Supports “alternate modes”... like DisplayPort
- “...beyond 20 Gbps in the future.”
 - Pres. USB-IF




TOP-MOUNT RECEPTACLE

TYPE-C PLUG & CABLE



USB 3.1 Types-C hub

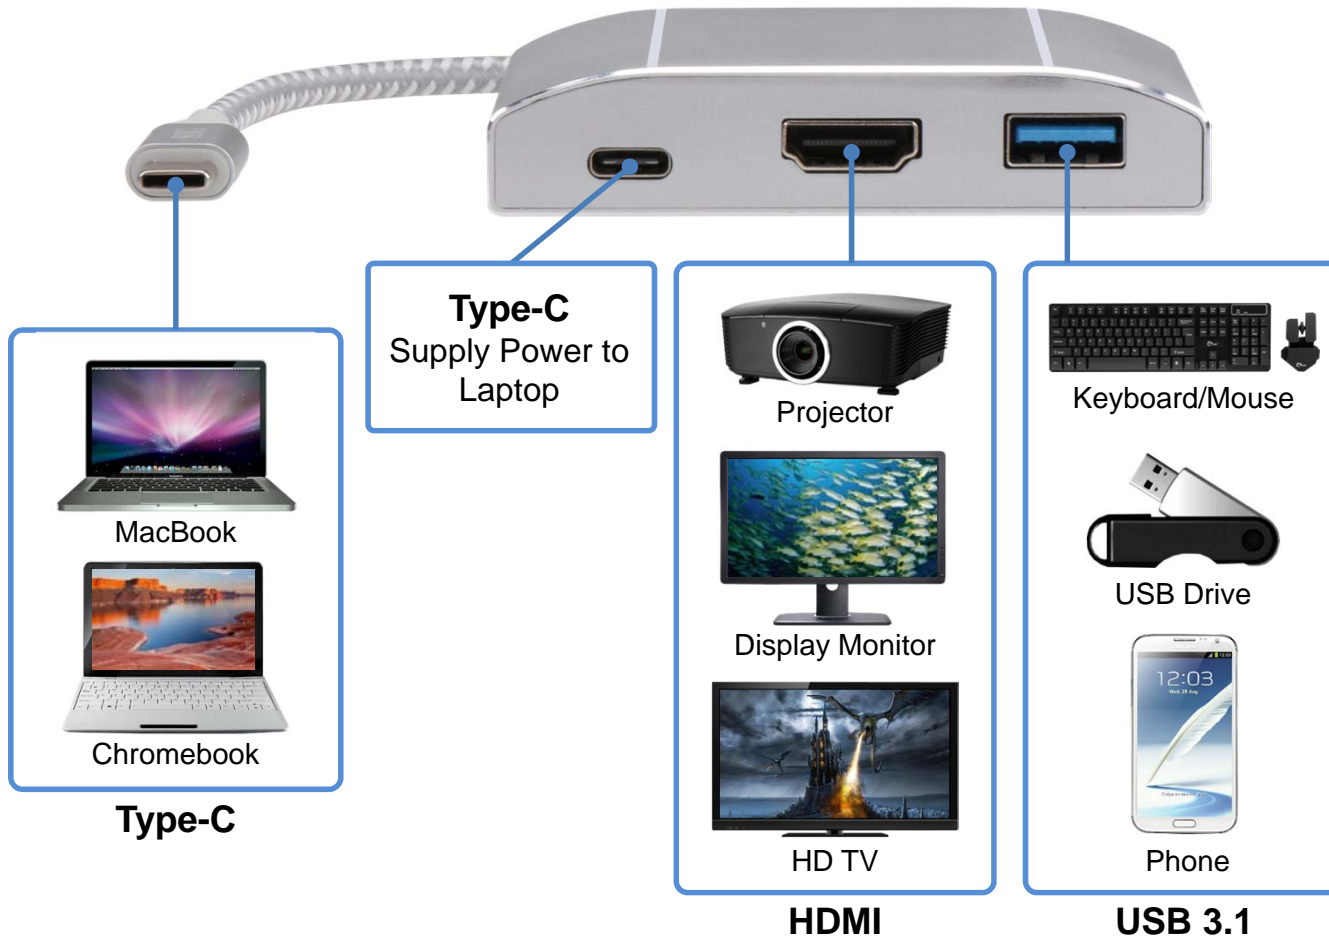

Digital Video Signals – HDMI

- HDMI is an uncompressed digital video signal
 - Designed for the consumer market
- Adds support for:
 - Audio – stereo and surround formats (PCM, Dolby, DTS)
 - YCbCr color space – optional
 - HDCP – optional but recommended
 - CEC – Consumer Electronic Control – optional
 - InfoFrames



HDMI – Connectors, Distance, Communication



Standard



Mini



Micro



Mini


- Added in HDMI version 1.3

Micro

- Max resolution 1080p


HDMI specification does not define transmission distance

- Cable performance has a direct bearing on distance




EDID information is sent from the display to the source

- Required by HDMI specifications

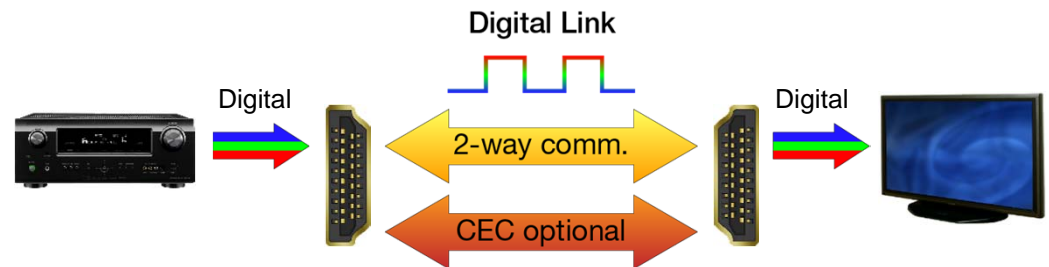

HDMI 2.0

- New functionality includes
 - Enables transmission of HDR – High Dynamic Range video
 - Signaling speed to 18 Gbps
 - 4K@50Hz/60Hz, (2160p)
 - 4 times the clarity of 1080p/60 video resolution
 - Up to 32 audio channels with up to 1536 kHz audio sample frequency
 - 32 channels @ 48kHz each
 - Dual video streams on same screen, 4 audio streams
 - Support widescreen 21:9 format
 - Dynamic sync of audio/video
 - CEC extensions with expanded control via single point
- Backwards compatible

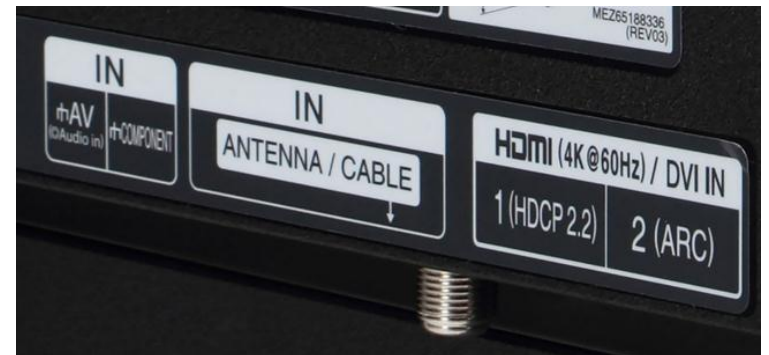

Resolution


4K / UHD and 1080p Video Signals


2017
BICSI CANADIAN
CONFERENCE & EXHIBITION
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA


Bicsi

Resolutions

- Old Resolutions
- New standard 1080p
- Headed to 4K/UHD

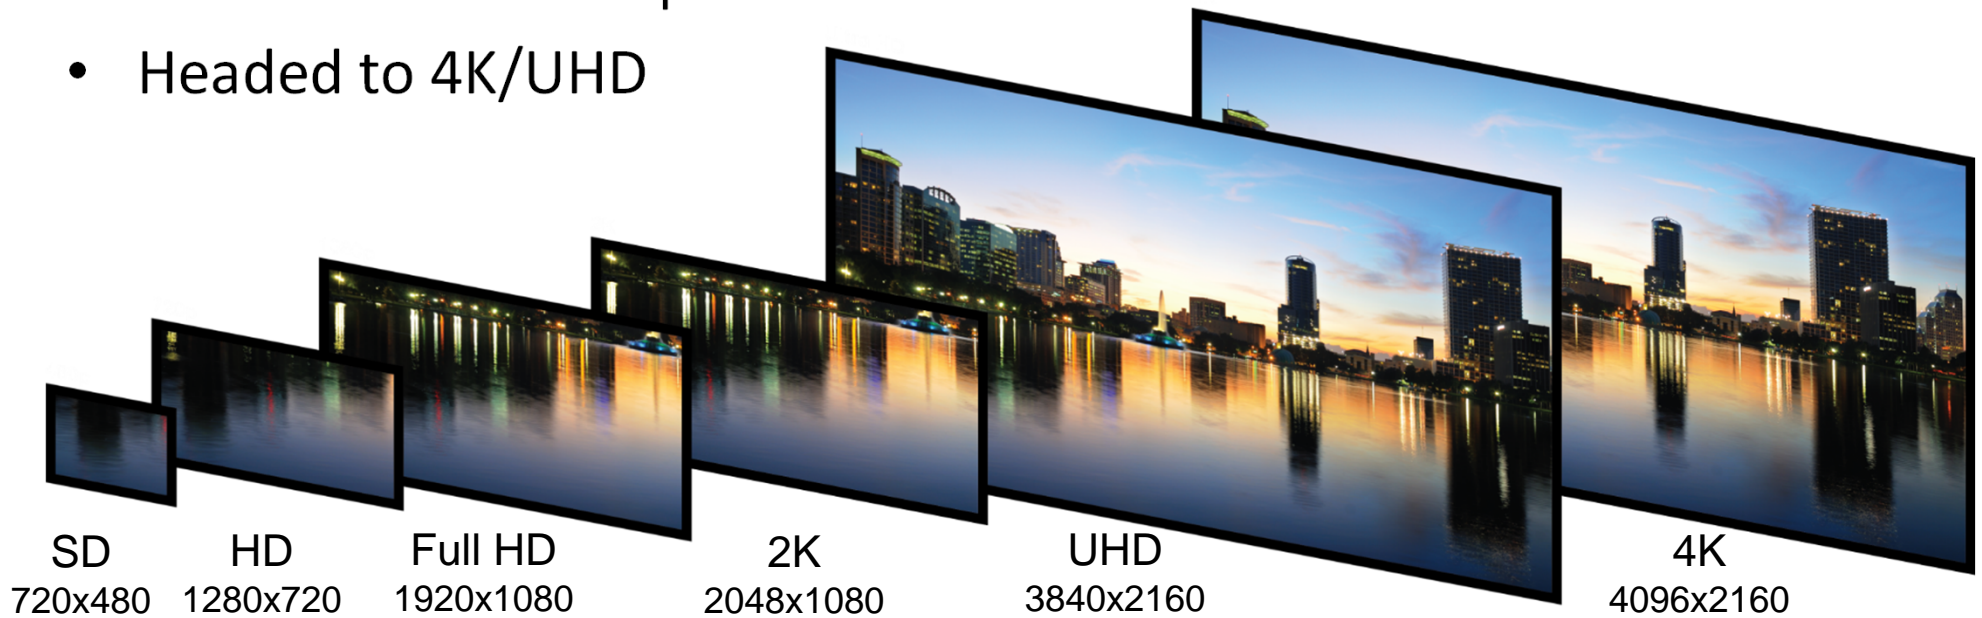

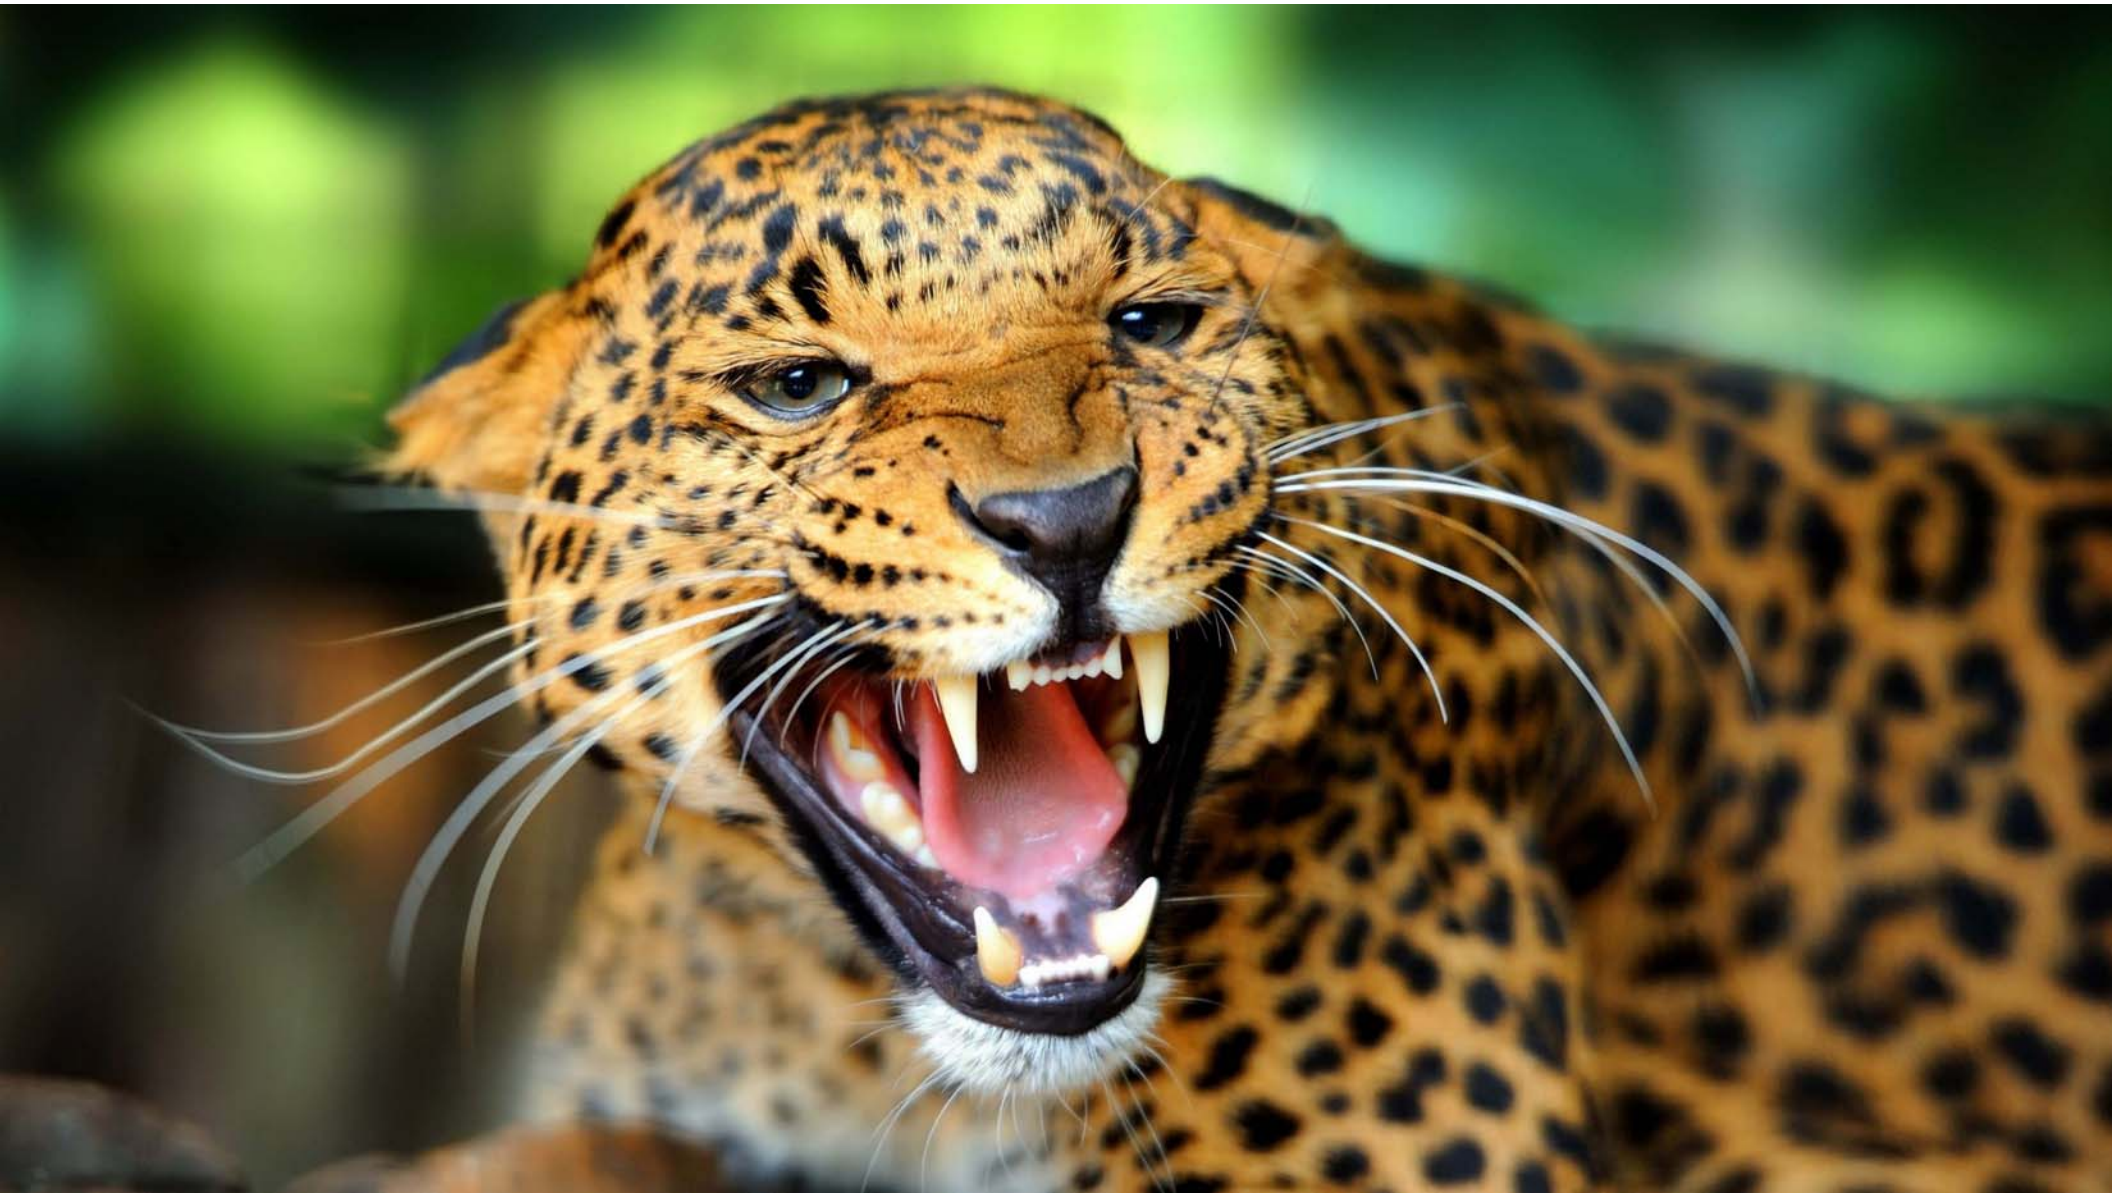

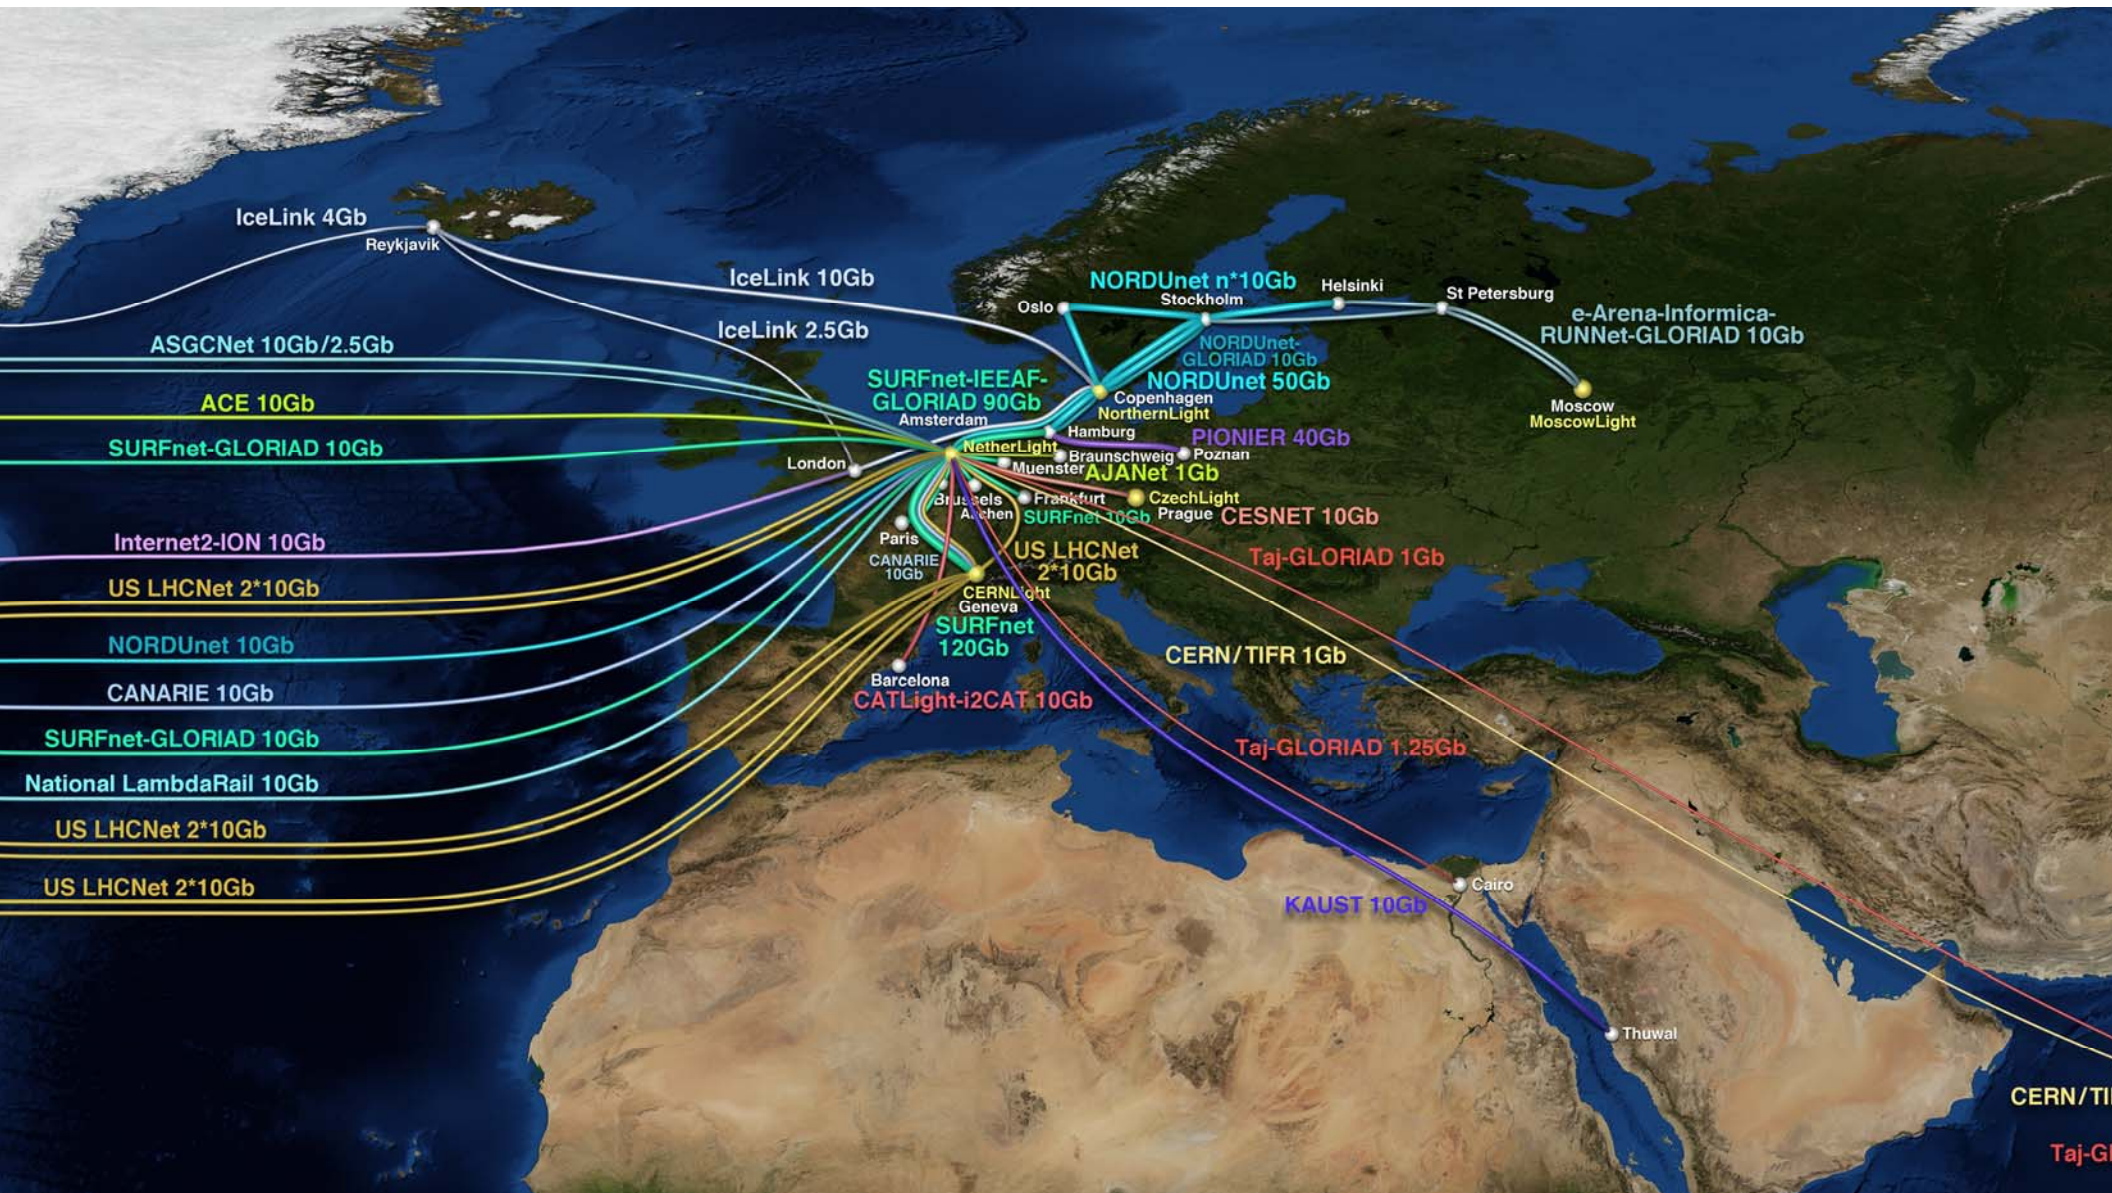





4K Video Signal – What You Need to Know

- Data rate requirements determined by
 - Resolution
 - Refresh rate
 - Chroma sampling
 - Color bit depth
 - Maximum supported data rate




4K Signal Parameters

- 4K DCI is 4096x2160
 - Four times the resolution of 2K DCI
 - Targeted towards digital cinema
- 4K refresh rates
 - Varies – 24 Hz up to 60 Hz
- Color bit depth
 - 8-Bit, 10-bit, and 12-bit
- Aspect Ratio
 - 17:9 – same as 2K

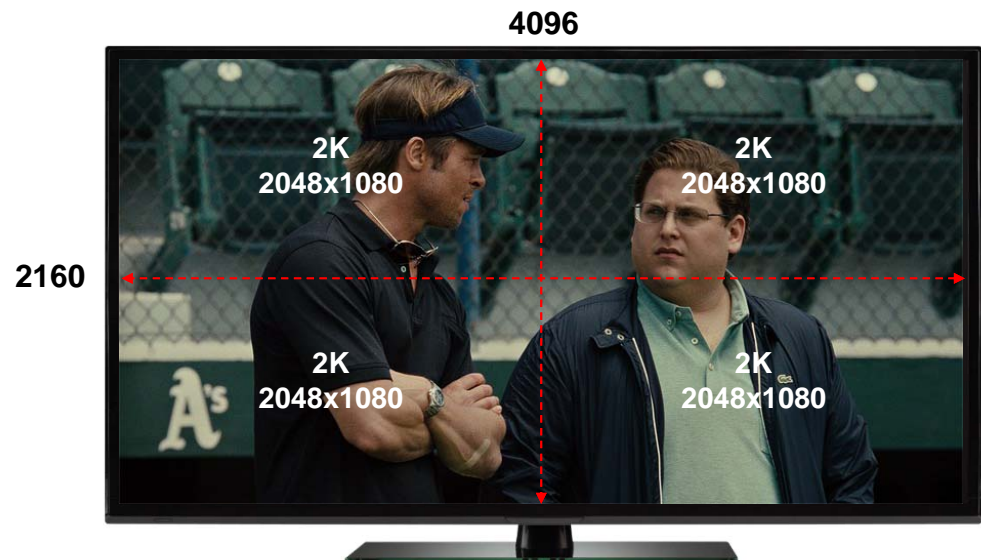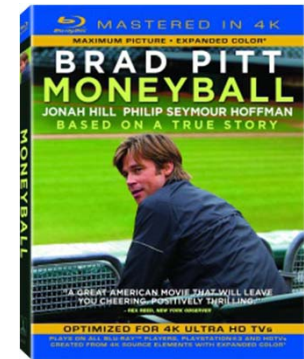


Ultra HD Video Signal Parameters

- Ultra HD is 3840x2160
 - Four times the resolution of 1080p
 - Targeted towards consumer and broadcast markets
- Ultra HD refresh rates
 - Varies – 24 Hz up to 60 Hz
- Color bit depth
 - 8-Bit, 10-bit, and 12-bit
- Aspect Ratio
 - 16:9 – same as 1080p

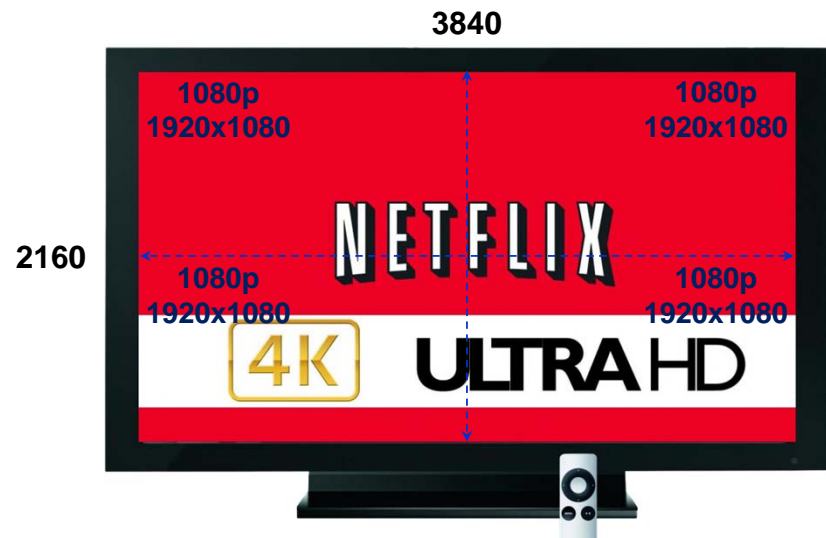


4K and Ultra HD Resolution Comparison

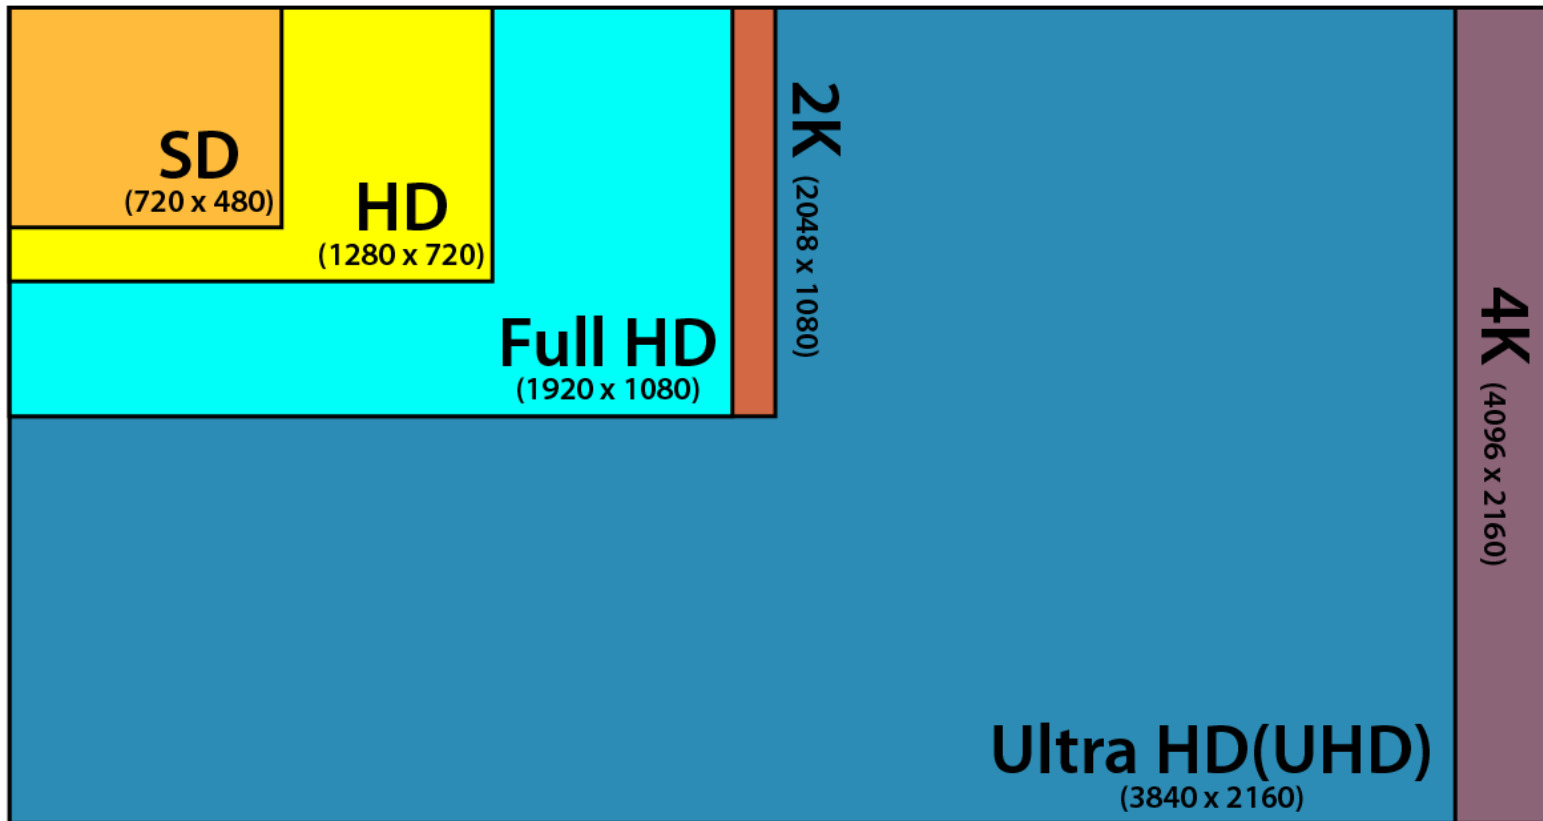

Wide Color Gamut


- UHD proposes a significantly broader color space standard
 - Rec. 2020 supports a very wide color gamut

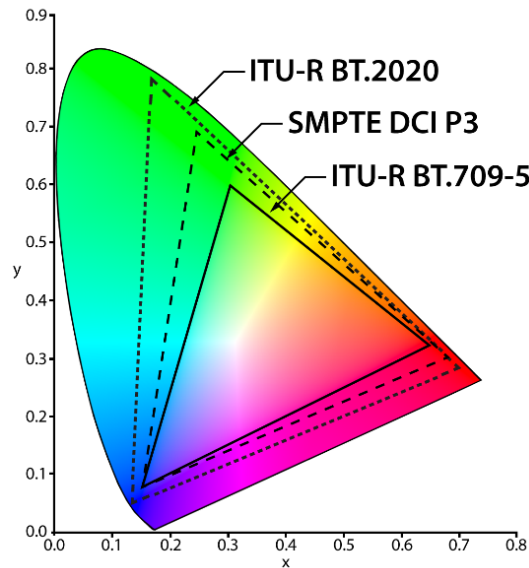

CIE 1931 chromaticity diagram

Ultra HD Color Bit Depth

- For UHD to achieve the full color spectrum of REC-2020, greater color bit depth is required



8-bit

- 256 shades for each color
- $256^3 = 16$ million colors




10-bit

- 1024 shades for each color
- $1024^3 = 1$ billion colors



12-bit

- 4096 shades for each color
- $4096^3 = 68$ billion colors

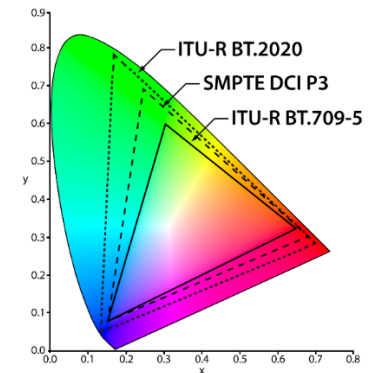


HDR – High Dynamic Range

- Produces video with a greater contrast range closer to what the human eye perceives
 - Color gamut is technically not part of HDR but goes hand in hand since greater contrast and brightness will display more colors



Standard Dynamic Range

High Dynamic Range

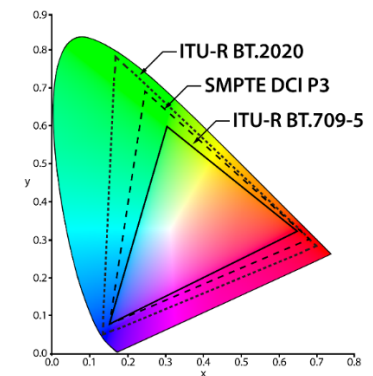

UHD Alliance Premium Certified

- Rating applied to displays that meet or exceed certain performance minimums for Ultra High Definition displays
 - Specs include High Dynamic Range and Wide Color Gamut, brightness and more
 - Resolution: 3840x2160 pixels
 - Color depth: 10-bit
 - Color gamut: Wide, including the ability to show at least 90% of the P3 color gamut



4K Applications with HDMI

- Optimal 4K parameters depend on the application

4K Applications with HDMI: Requirements and Compromises						
Application	Refresh Rate	Color Bit Depth	Sub-sampling	Color Space Version	HDMI Version	Comments
Consumer/Residential	60Hz	8-bit	4:2:0	BT.709	1.4	Single Cable
Digital Signage	60Hz	8-bit	4:2:0	BT.709	1.4	Dynamic Content – Single Cable
	30Hz	10-bit	4:4:4	BT.2020	2.0	Static Content – Single Cable
Corporate Presentation	30 Hz	8-bit	4:4:4	BT.709	1.4	Single Cable
Graphic Workstations	30Hz	8/10/12bit	4:4:4	BT.709/ BT.2020	1.4/2.0	Single Cable
Special Applications (Medical/VR/Military)	High Frame Rate (>60Hz)	12/16bit	4:4:4	BT.2020	2.0	Multi-Lane signal paths

Transmission Methods

2017
BICSI CANADIAN
CONFERENCE & EXHIBITION
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA



Bicsi

CAT Cable



Why Use Twisted Pair?

- One twisted pair cable can carry multiple signals
 - Video
 - Audio
 - Bidirectional RS-232 control and IR
 - Ethernet
 - Remote Power



Twisted Pair Transmission

- Distance
 - 328 feet (100 meters) between endpoints



Twisted Pair Transmitter
for HDMI




Twisted Pair Receiver
for HDMI

328 feet/100 meters


XTP Twisted Pair Transmission

- Distance
 - 328 feet (100 meters) between devices

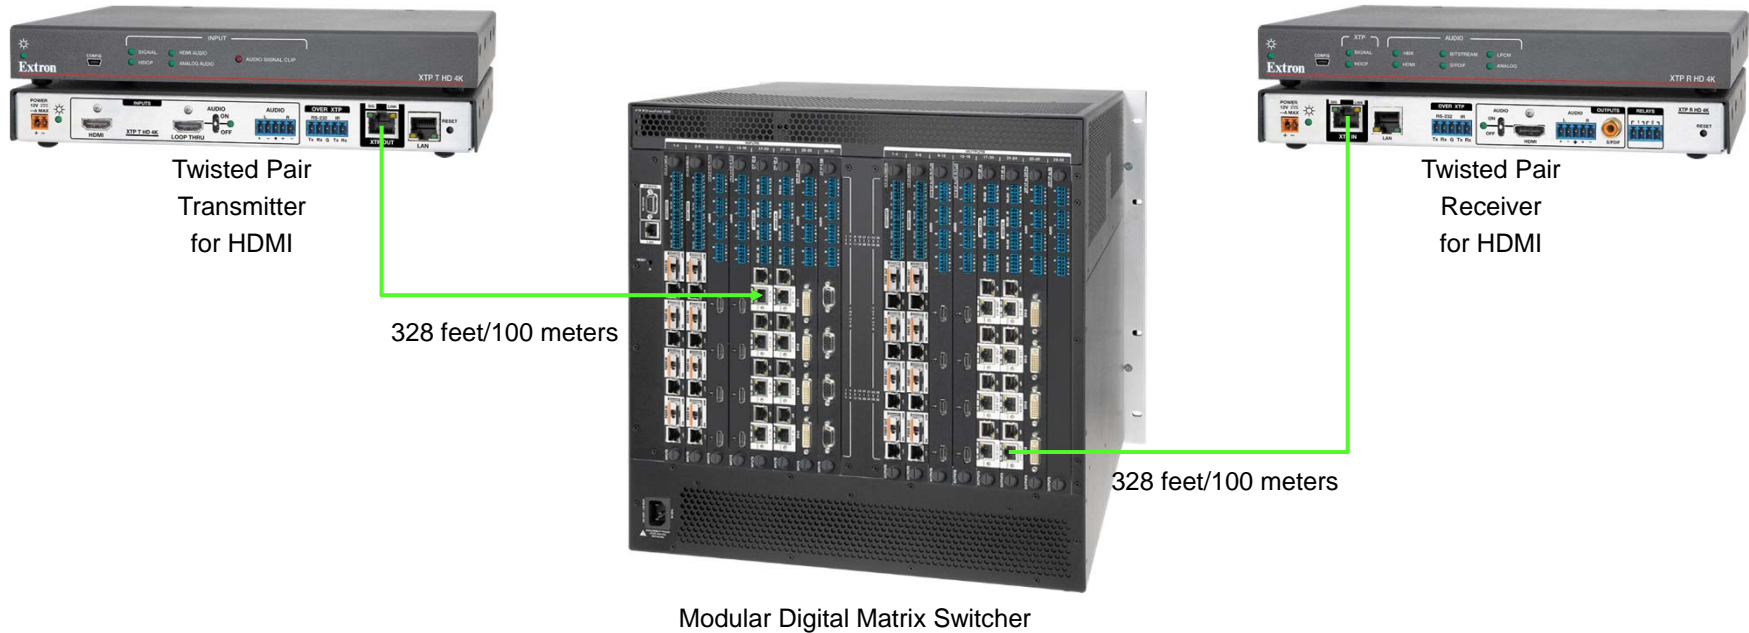



Twisted Pair Transmission

- Cable
 - Supports CATx cable
 - Solid conductor, shielded twisted pair cable with shielded connectors should always be used
 - Skew-free cable **should not** be used with XTP Systems

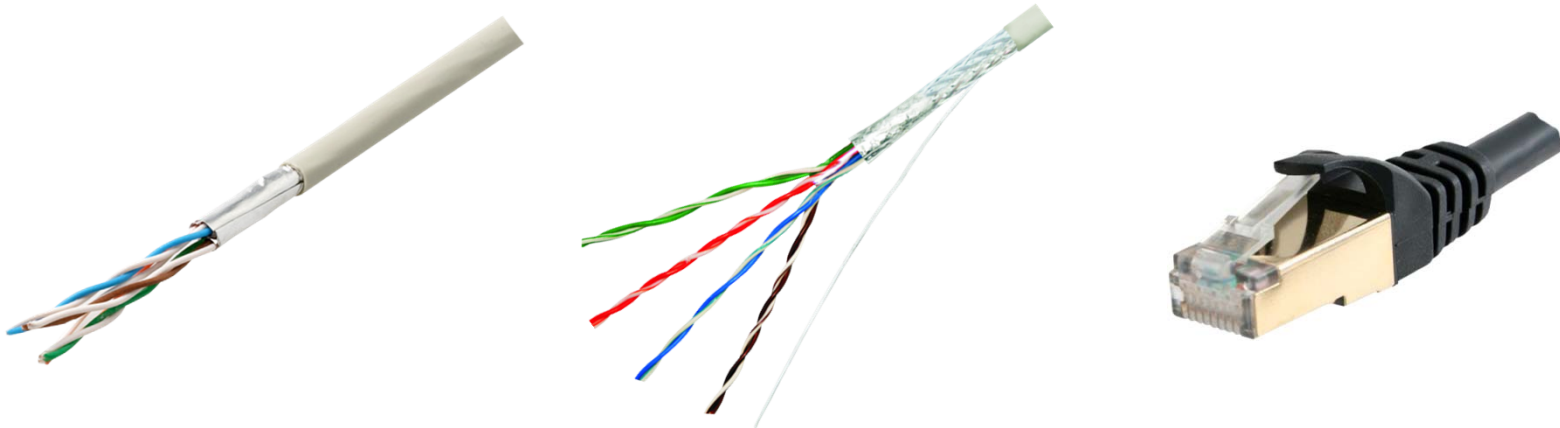

Twisted Pair Signal Transmission

- Shielded cable protects against outside interference from:
 - Air conditioning units
 - Power from adjacent cabling
 - Crosstalk from other cables or within the same cable
 - Radio interference from walkie-talkies
- Symptoms of noisy environments
 - Image drop-out or flashing
 - No image at all

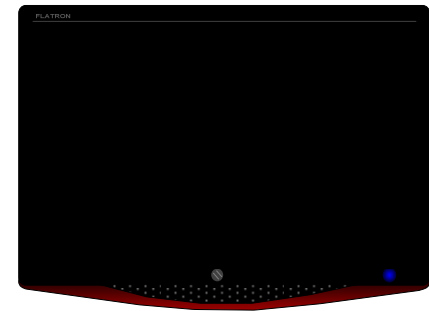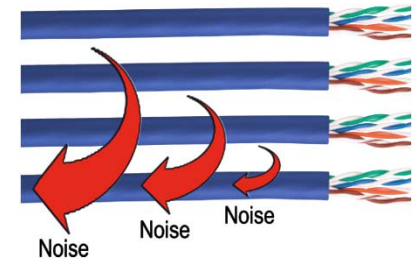


Twisted Pair Shielding


- Different types of twisted pair shielding

Cable Name	Outer Shielding	Individual Pair Shielding
U/UTP	None	None
F/UTP	Foil	None
U/FTP	None	Foil
S/FTP	Braided	Foil
SF/UTP	Braided & Foil	None


U/UTP




F/UTP

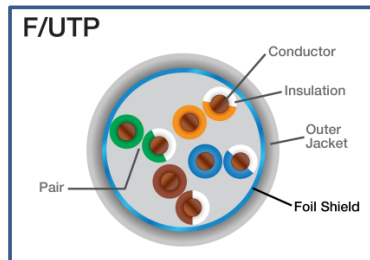


U/FTP



S/FTP



SF/UTP

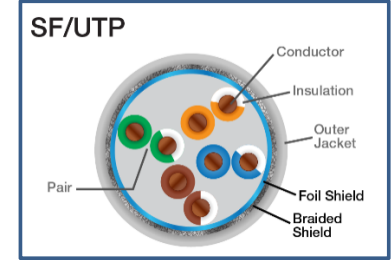


Twisted Pair Signal Transmission

- Types of Category cable

Cable	Gauge	Conductor	Outer Shield	Pair Shielding	Required Bandwidth	Crosstalk Loss
CAT 5e (U/UTP)	24	Solid	None	None	100 MHz	~27dB
CAT 5e (F/UTP)	24	Solid	Foil	None	100 MHz	~27dB
CAT 6 (U/UTP)	24-23	Solid	None	None	250 MHz	~37dB
CAT 6 (STP)	24-23	Solid	Foil	None	250 MHz	~37dB
CAT 6a (U/UTP)	24-23	Solid	None	None	500 MHz	~37dB
CAT 6a (F/UTP)	24-23	Solid	Foil	None	500 MHz	~37dB
CAT 6a (U/FTP)	24-23	Solid	None	Foil	500 MHz	~37dB
CAT 6a (SF/UTP)	24	Solid	Braid and Foil	None	500 MHz	~37dB
CAT 7 (S/FTP)	24	Solid	Braid and Foil	Foil	600 MHz	~60dB
CAT 7a (S/FTP)	24	Solid	Braid and Foil	Foil	1 GHz	~60dB

Twisted Pair Installation

- Cable infrastructure and patch points
 - Up to 2 patch points recommended

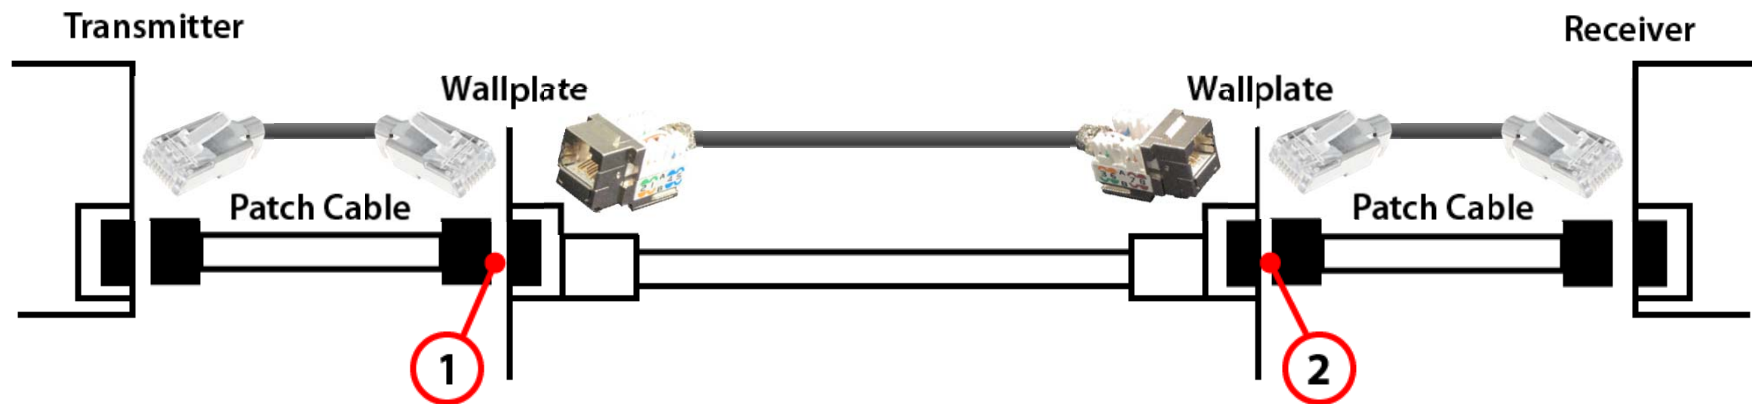


Typical scenario for AV connectivity

Fiber



Benefits of Fiber in AV Systems

- Secure transmission
- Resistant to ground loops
- Low attenuation
- EMI/RFI immunity
- Lightweight
- Connector install speed
- Future-proof system

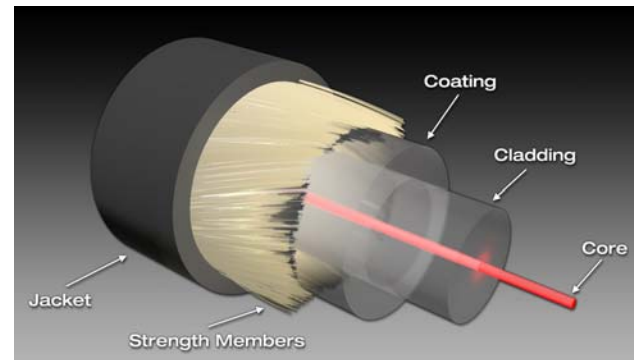


Fiber Optics Fundamentals

- A basic fiber optic system contains three parts
 - Transmitter (electrical to optical conversion)
 - Fiber optic cabling (light transmission)
 - Receiver (optical to electrical conversion)




Fiber Optic Cable Performance


- Fiber is categorized by performance and function
- Multimode fiber has four classifications
 - OM1 and OM2 fiber were built for LED systems
 - Typically supports up to 100 Mb networks
 - Low bandwidth performance
 - OM3 and OM4 are designed to work with LASERS
 - Supports 10 Gb networks
 - Can carry high bandwidth signals long distances
- Singlemode fiber has two classifications
 - OS1 and OS2

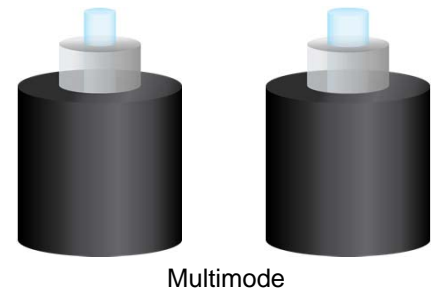


Fiber Equipment Selection

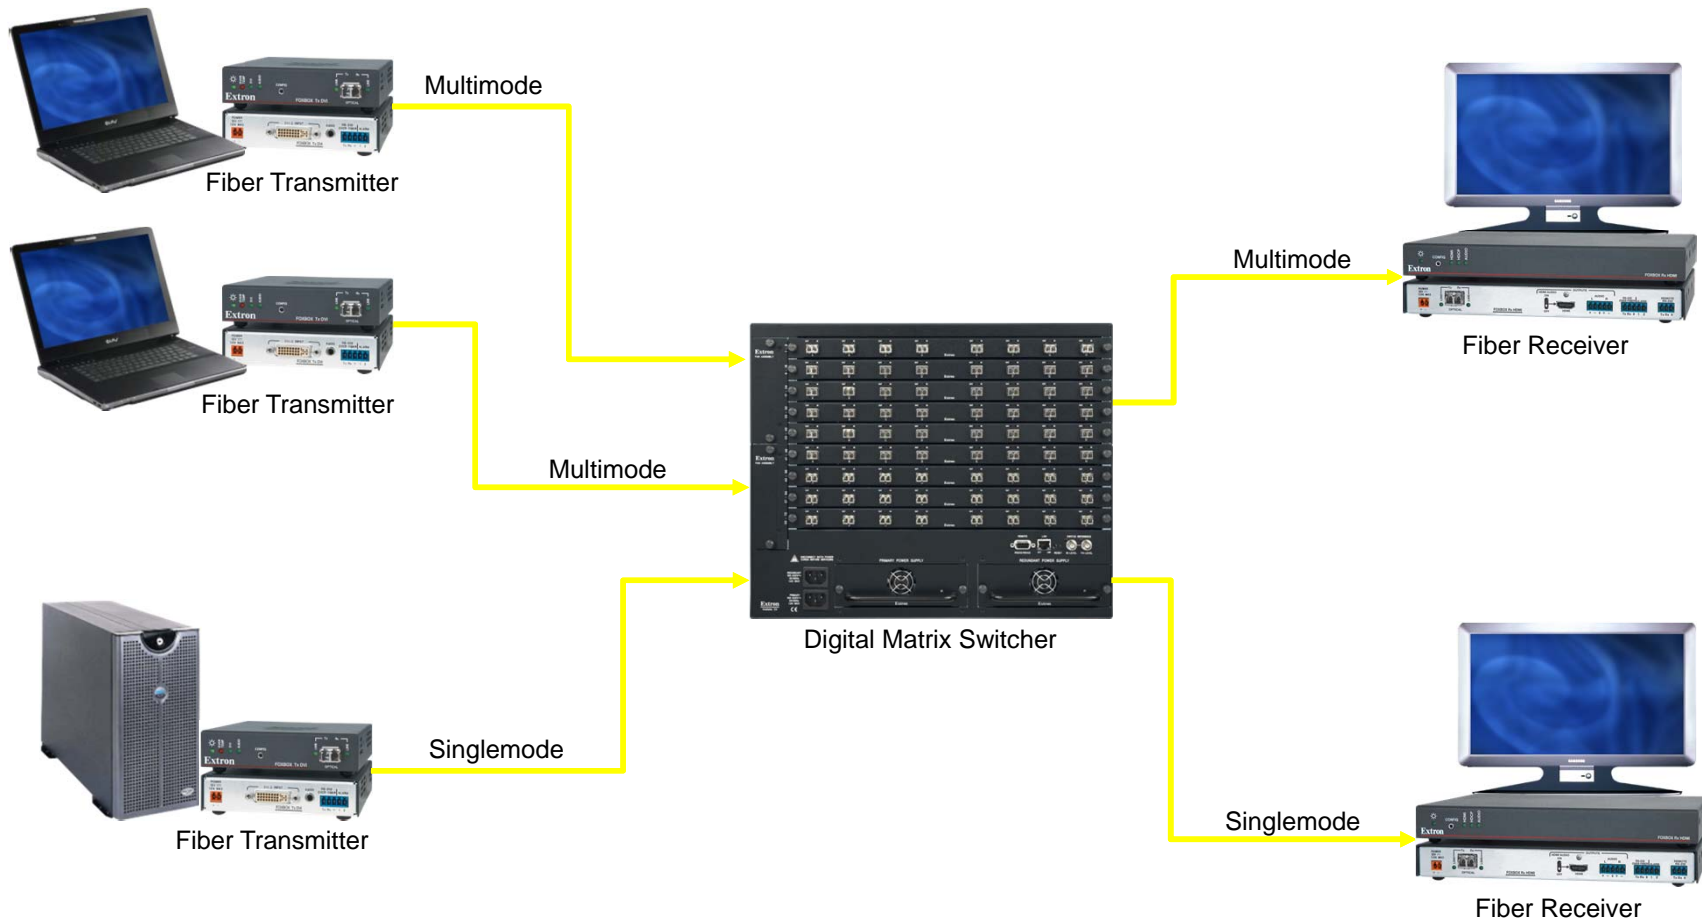


Fiber Optic Cable Performance

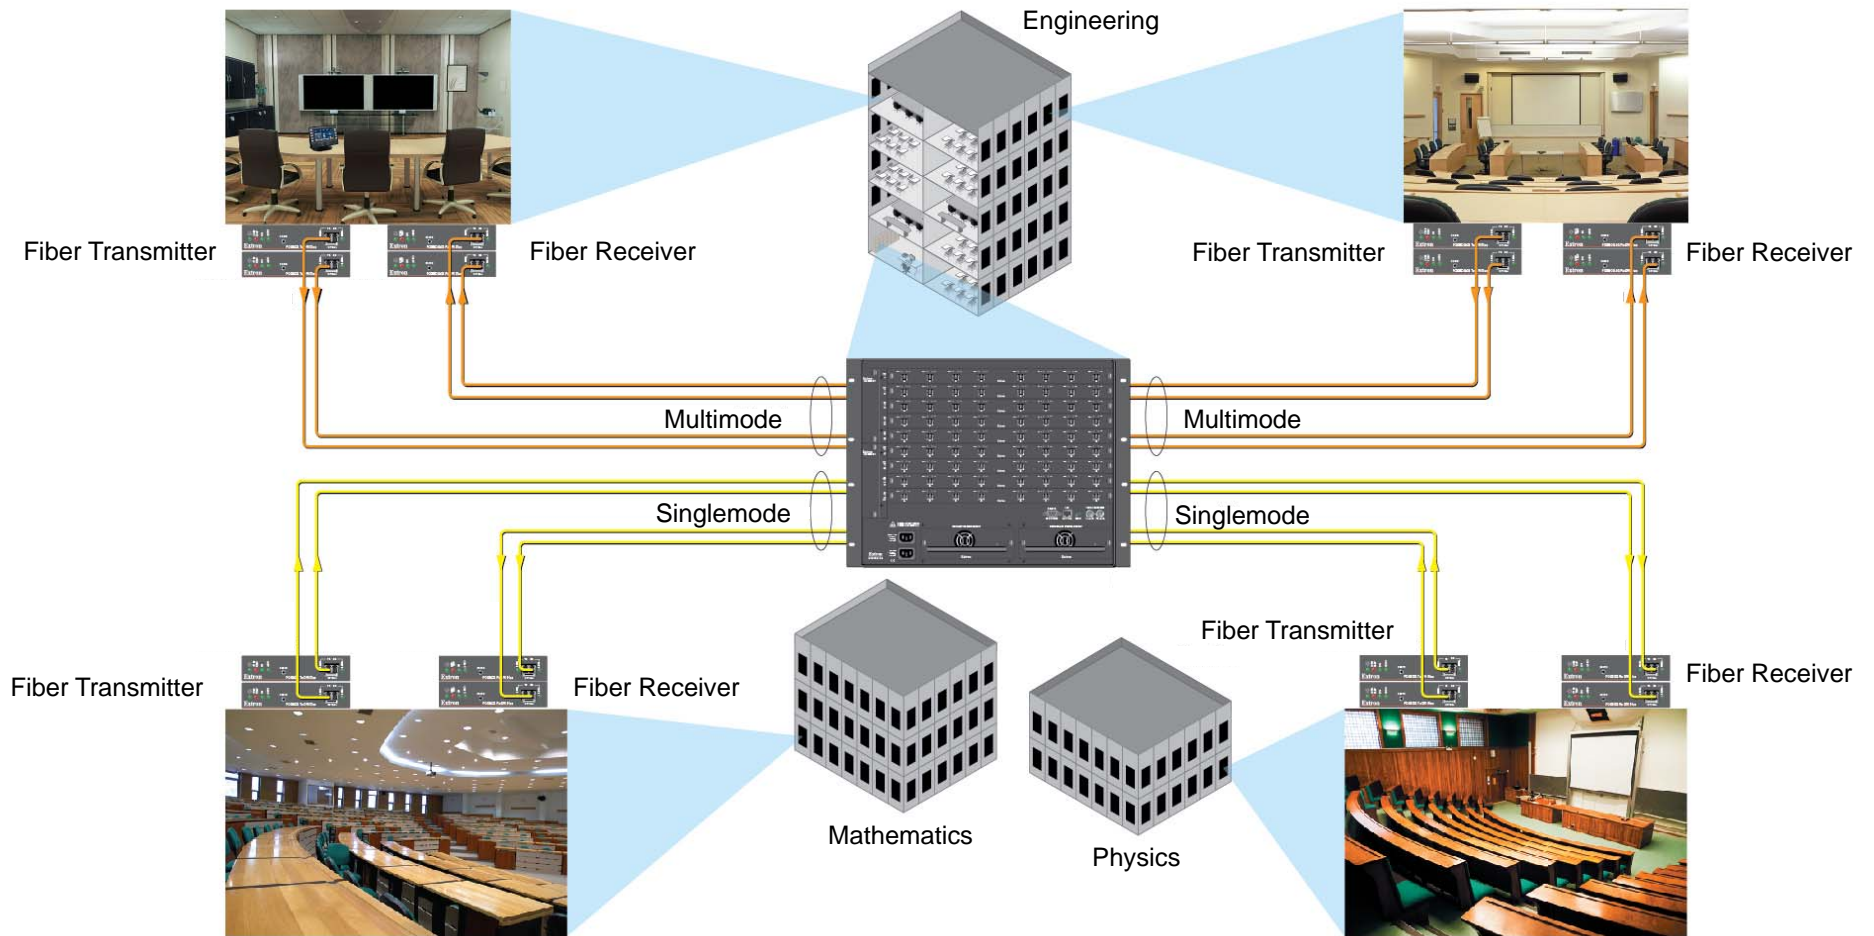

Wireless


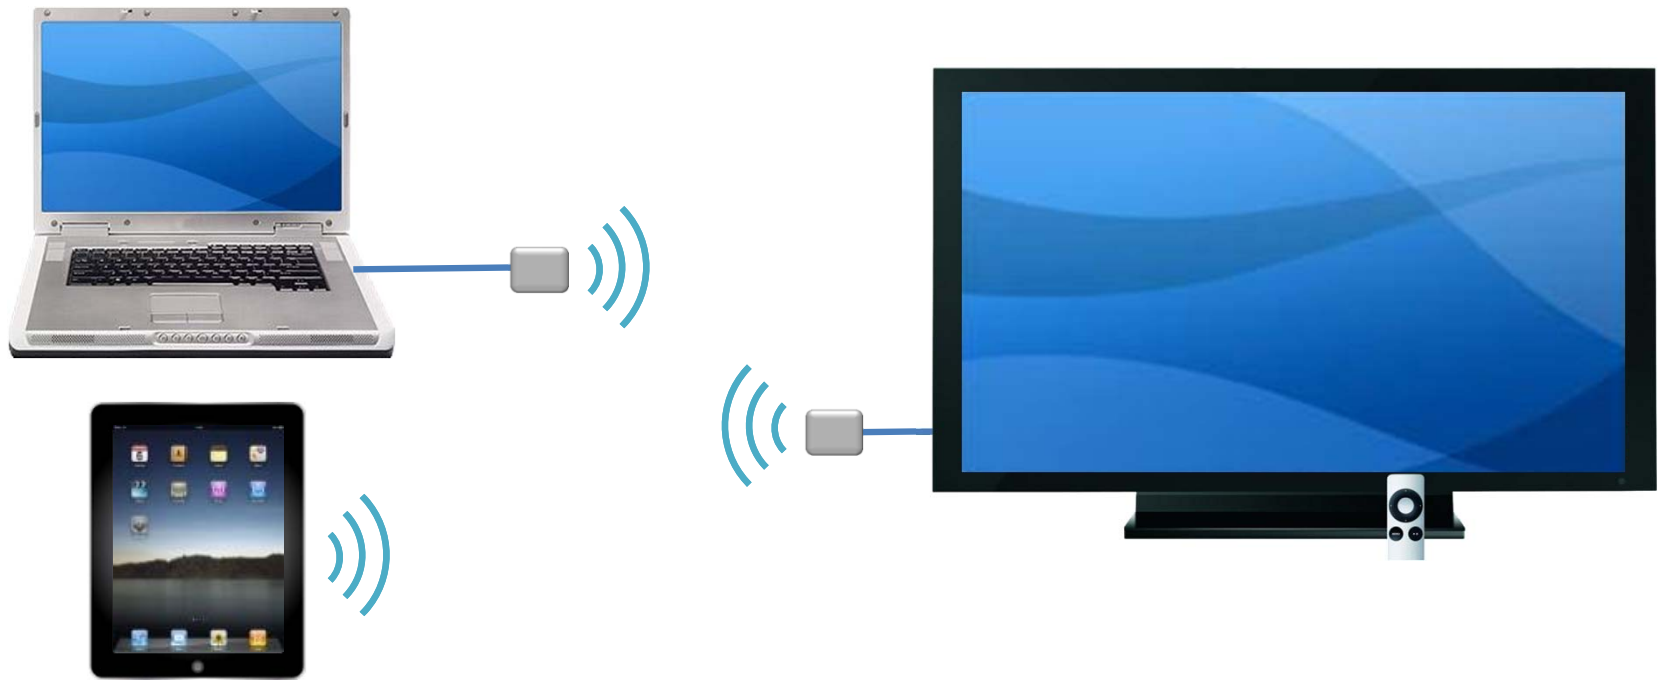


Wireless Video Applications

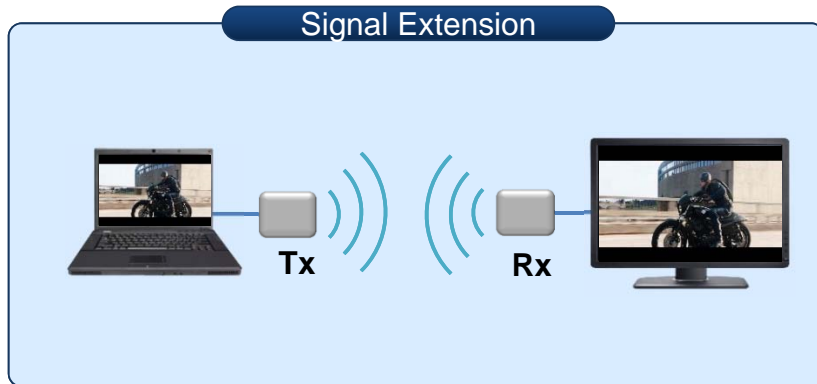

- Point-to-point applications where source video signal is converted to a modulated RF signal for wireless transmission to a receiver connected to a display
- BYOD applications where computing device encodes and transmits video content over a Wi-Fi network to a receiver connected to a display


Wireless Video Applications

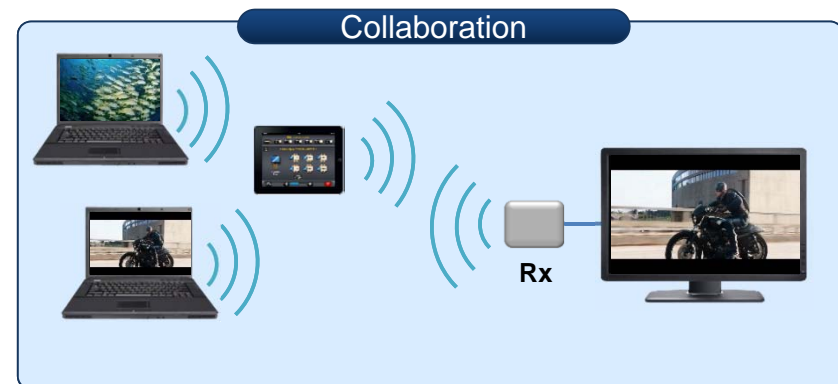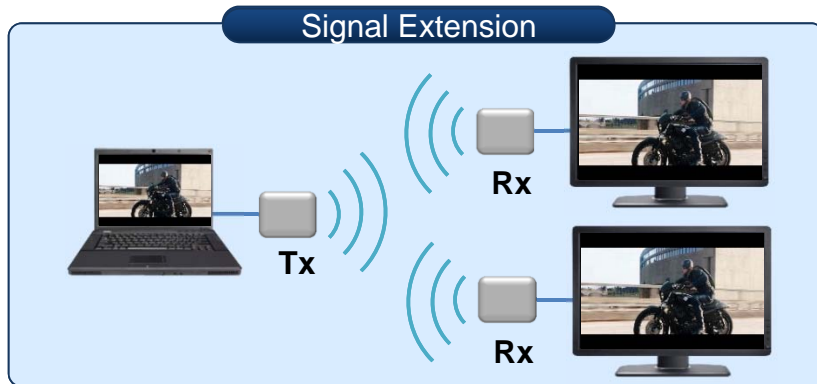

- No computing device required – simple signal extension
 - Real-time performance – extremely low latency
 - High video quality – maintains resolution, refresh rate, color depth
 - Works with more types of video sources
 - Entire bandwidth is dedicated to video
- Wide availability of networking and compression technologies
 - Receiver is the only hardware required
 - BYOD devices already have Wi-Fi built-in
 - Loaded software can perform video compression
 - Mobile device acts as transmitter


Mirroring iOS Devices

- Works for Apple iPads and iPhones
- Use Control Center on your iOS device
 - Swipe 'up' for Control Center
 - Select ShareLink from Airplay Device List
 - Disconnect when done

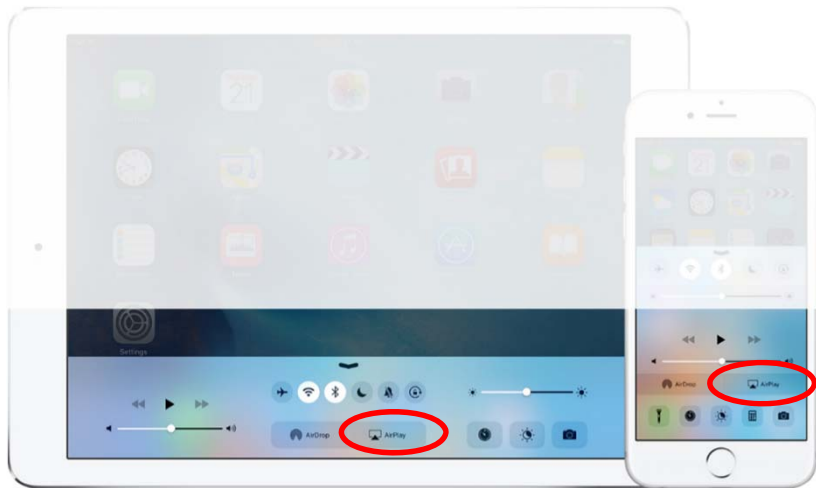

Wireless Collaboration

- Simultaneously share up to 4 different devices

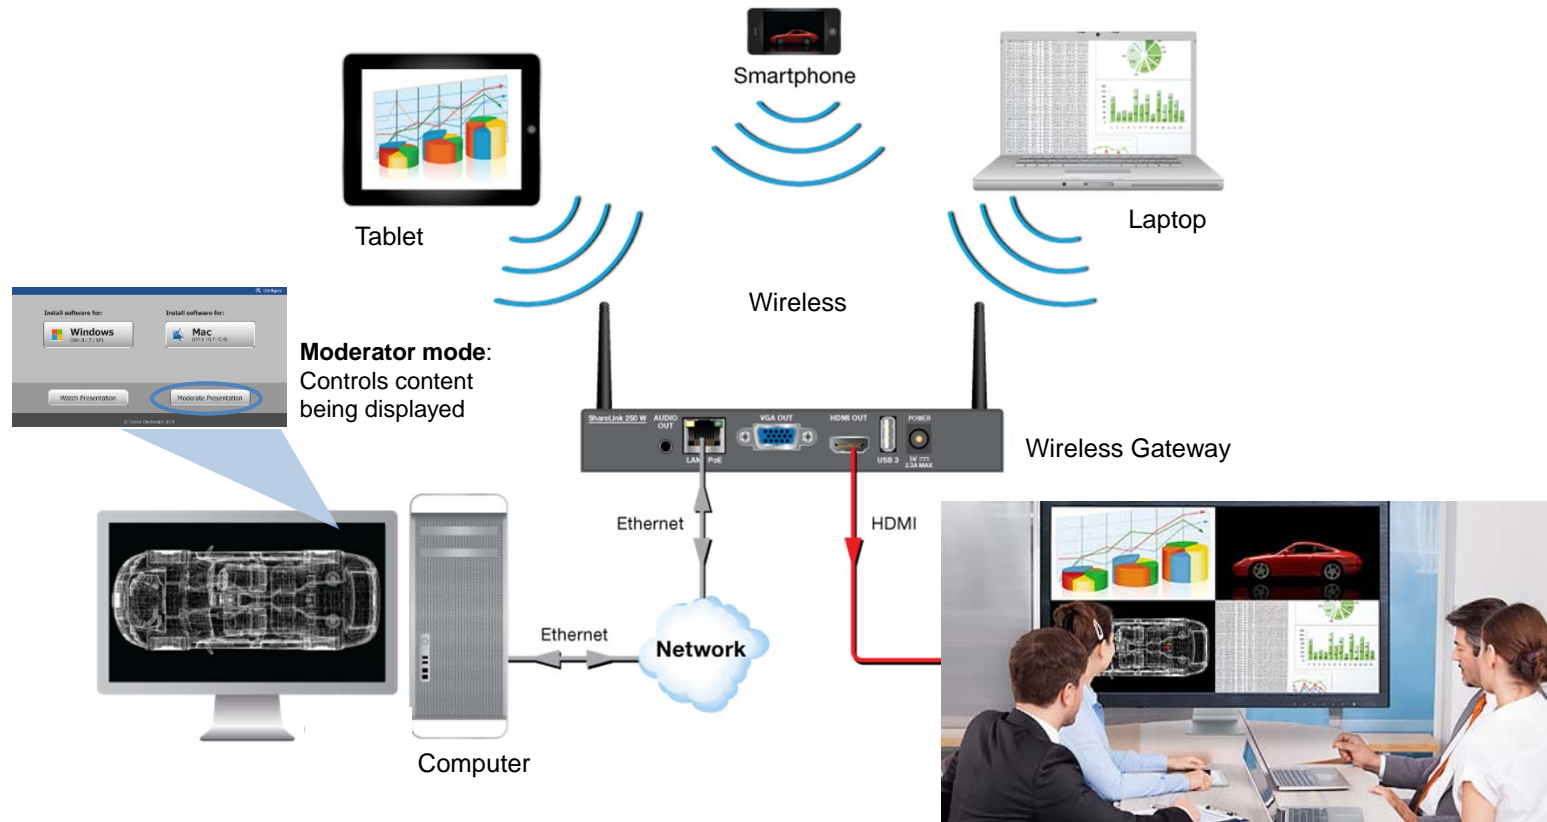

Digital Video for BICSI Folks

Karl Rosenberg, Regional Applications Specialist
Extron Electronics



2017
BICSI CANADIAN
CONFERENCE & EXHIBITION
MAY 8-11 • VANCOUVER, BRITISH COLUMBIA, CANADA



Bicsi